


Product Highlights

- Operating Temperatures:
-60°C to +200°C
(-76°F to +392°F)
- Excellent cut-through and abrasion resistance
- Lightweight construction
- FAR Part 25.853
- Halogen-free
- Self-wrapping design
- Easy to apply and remove
- Ideal for reworking components without disconnecting them
- Water repellent

Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)

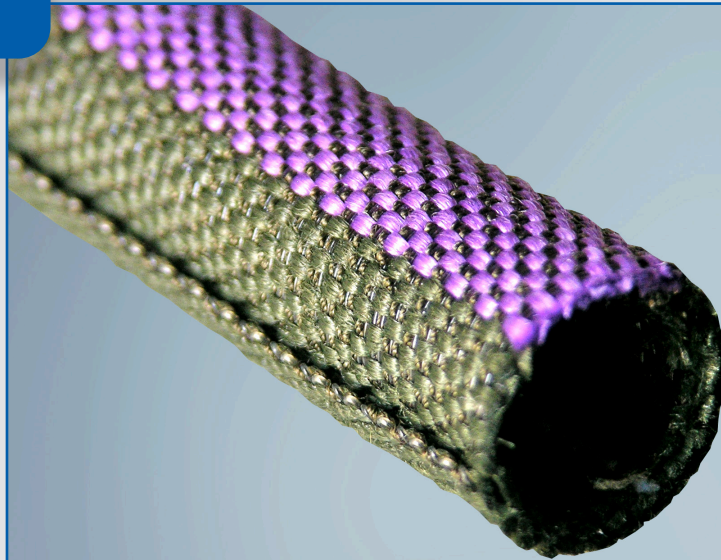

ROUNDIT® 2000 NX VTR is a woven combination of Nomex® and PPS (poly-phenylene sulfide). The Nomex/PPS blend in a flat weave construction gives ROUNDIT 2000 NX VTR a rugged yet smooth texture and appearance for high temperature bundling and abrasion resistance. This product is rated to +200°C (+392°F) and is non-halogenated.

ROUNDIT 2000 NX VTR is ideal for commercial and defense aircraft applications due to its excellent abrasion resistance and halogen-free qualities.

ROUNDIT 2000NX VTR has been specially designed to identify and protect wire harnesses made of optical fiber

ROUNDIT® products are tough, lightweight oversleeves used to bundle and protect cable assemblies, hoses and wire harnesses from chafing, cutting and abrading. The self-wrapping feature of ROUNDIT products allows for quick and easy application and removal of the product for assembly and maintenance. The product may also be applied or removed without disturbing connectors or fittings.



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT® products on cable and wire configurations.